

[Center Sizer. HCS]

HAZEMAG


**Experience.
Innovation.
Results.**

Crushing | Screening | Feeding

Center Sizer

Smooth crushing of soft to medium-hard material with a low percentage of fines

- Is used as a primary or secondary crusher for soft to medium-hard raw materials
- Also optimal in the comminution of sticky materials with high moisture content
- The comminution of the feed material is realized by compression and shearing induced by two fixed crushing rolls at low speed with high torque
- A high degree of safety and minimum maintenance requirement

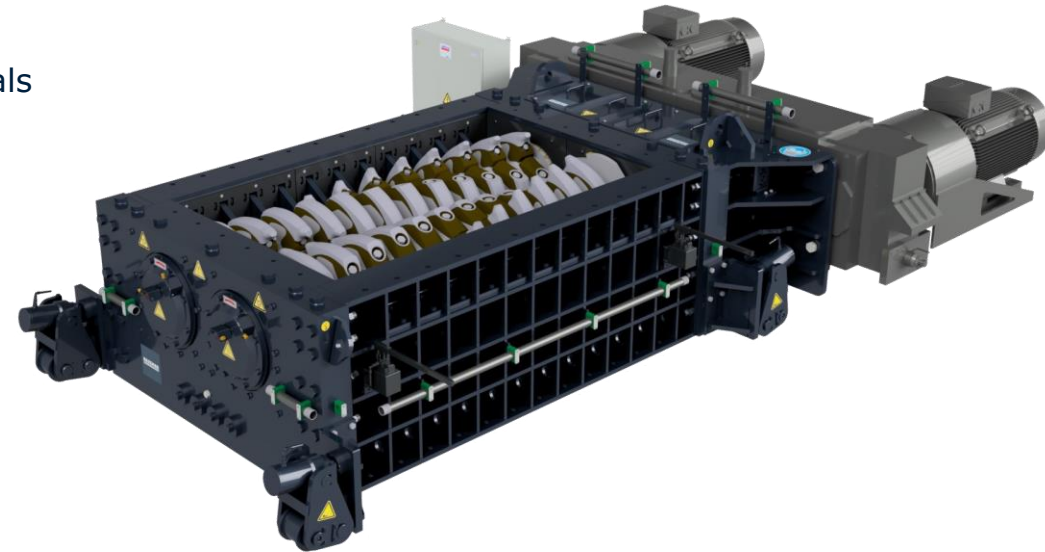



Application

- Center Sizers are typically used in applications in which fines need to be limited
- They are often also associated with the need to deal with difficult materials such as clay
- They are also often used in applications where building height is a concern




Primary vs. Secondary

- Primary applications:
 - Heavy duty crushing caps with special helical arrangement
 - Patented form-fit crushing rings
 - Adjustable gap setting between the crushing roll and breaker bar
 - Exchangeable wear caps and breaker bar
 - Easy, safe and quick exchange of the breaker bar
- Secondary applications:
 - Exchangeable crushing segments
 - True-fit / dovetail segment securing system
 - Wear resistant crushing segments
 - Product size variation by adjusting the shaft distance
 - High variety of scraper options

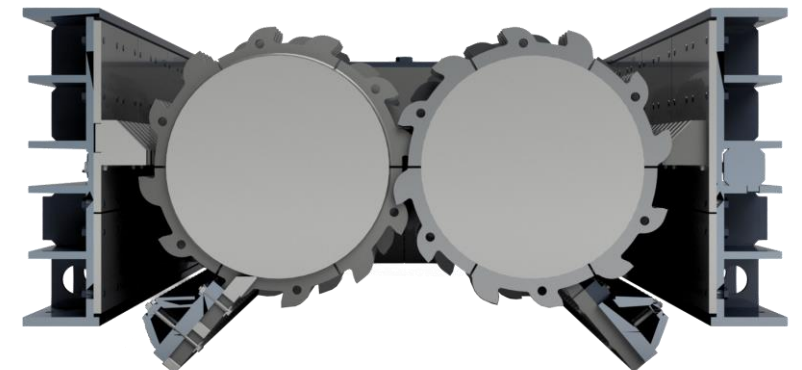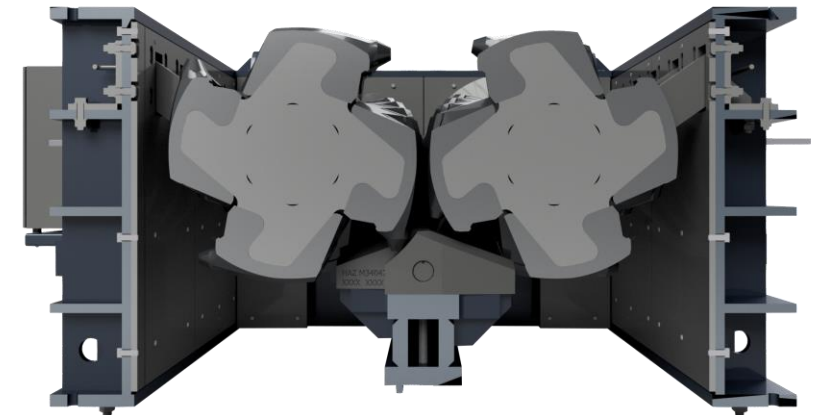


Operation Method

- Two toothed rolls are running towards each other
- Based on a continuous generation of pressure between counter-rotating rolls
- Deep immersing between the rolls due to the small number of high teeth
- Punctual force acting on material
- Both crushing rolls are turning at low speed with high torque
- Result: Minimization of fines

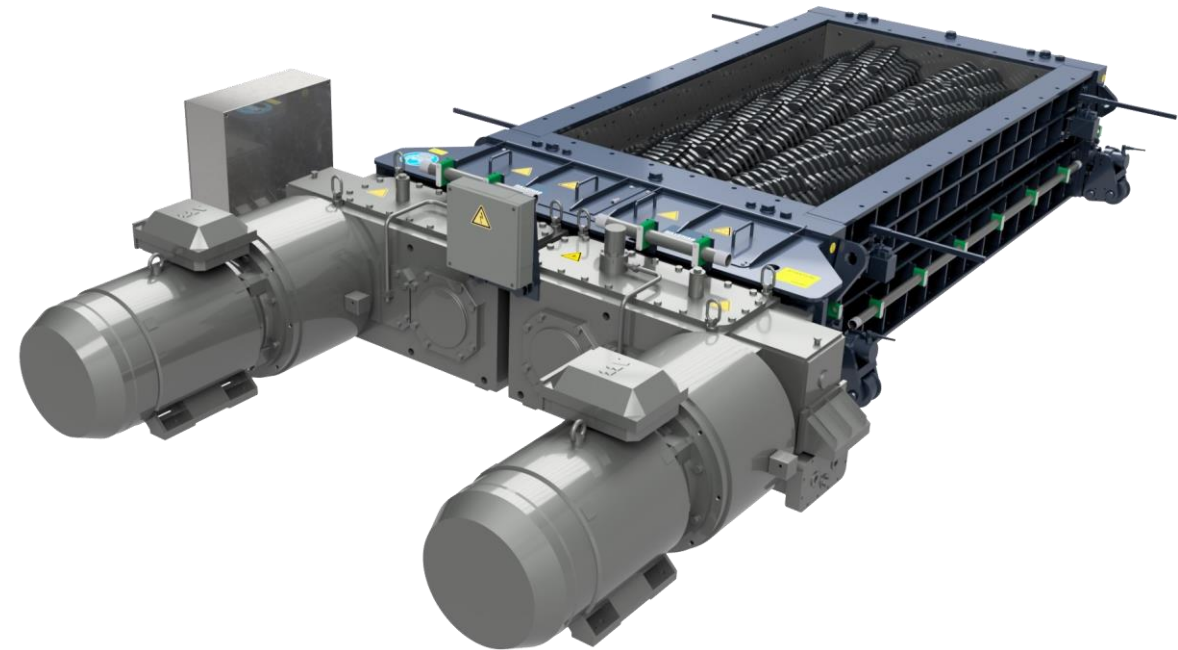


Equipment

- of Housing
 - Solid, very heavy duty front wall to absorb the stress
 - A very rugged, welded steel side wall construction fitted with wear liners and exchangeable scrapers
 - Internal wall with wear plates, protection for bearings and gap-setting components breaker bar
- Drive
 - The drive system consist of motor, fluid coupling, gear box and mechanical gear coupling (placed between gear box and crushing roll)
 - The advantage of the mechanical gear coupling is realized during a crushing roll exchange

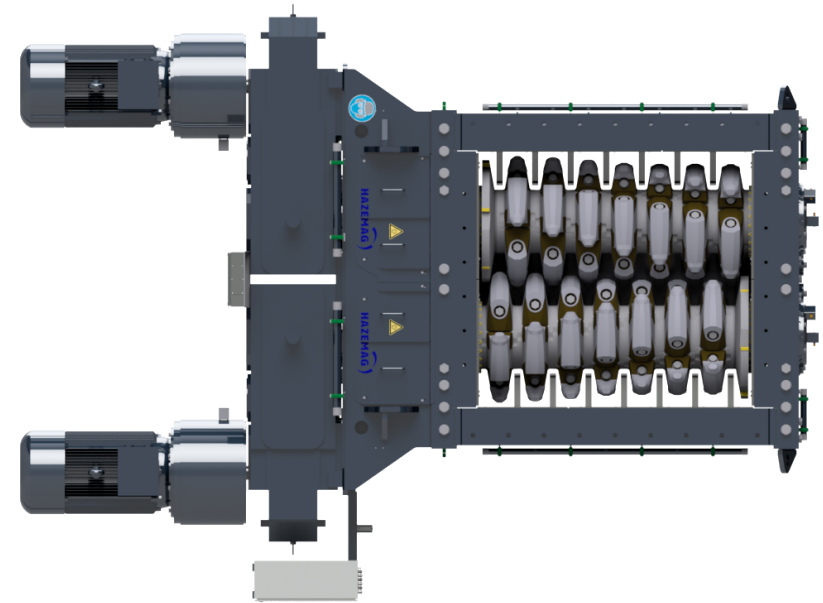

Equipment

- Track Roll Lifting Device
 - A system allowing for easy retraction of the sizer into maintenance position; thus, permitting full access to the sizer and its internal parts
- Roll Locking Device
 - With safety in mind all HAZEMAG sizer rolls can be fixed in position for safe maintenance
- Bearing System
 - Grease filled spherical roller bearing with axial fixation
 - Double sealing: labyrinth and rotary shaft sealing
 - Temperature monitoring

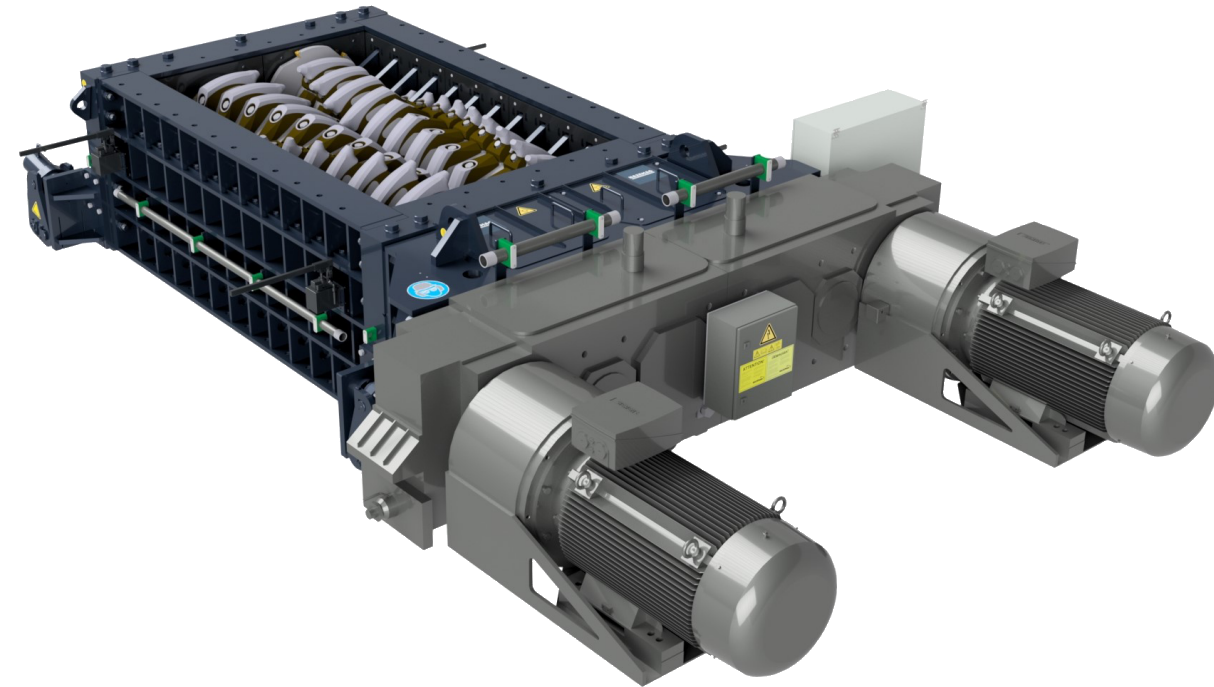

Center Sizer Primary

- Crushing rings with screwed, hard faced crushing caps mounted on a solid shaft
- Standard crushing caps
 - Hard faced crushing caps
 - Four caps at circumference
- Heavy-duty crushing caps
 - Hard faced crushing caps
 - Three caps at circumference
 - Wear plates at the flanks
- Breaker bar with screwed wear caps
 - Caps of wear resistance steel





hazemag.com

Copyright ©2022 HAZEMAG Systems. All rights reserved.
This document makes no offers, representations or warranties (express or implied),
and information and data contained in this document are for general reference only
and may change at any time.

